



»seventies« 70's

STROMSCHIENENSTRAHLER **se-11**

Seventies »70's« – die neue Leuchtenfamilie von mawa. Stromschienenstrahler, Aufbau-, Einbau- und Hängeleuchte.

Bei kleinstem Bauvolumen ohne sichtbare Verschraubung, 365° dreh- und 90° schwenkbar, integrierte Trafotechnik, 1800 Lumen, 26 Watt, CRI > 90. Mit dieser Volumen-Lichtleistung setzt mawa neue Maßstäbe.

Der Kühlkörper ist kraftschlüssig mit dem Gehäuse verbunden, dadurch wird die Kühlfläche vergrößert und sorgt für ein optimales Masse-Flächen-Kühlverhältnis.

Drei Hochleistungsreflektoren 13°, 20° und 35° mit einem Wirkungsgrad 90% stehen zur Auswahl. Diese sind, dank patentierter mawa-Technik, mittels eines Glassaugers austauschbar.


 pulverbeschichtet RAL 9016 weiß matt (-9016)

 pulverbeschichtet RAL 9005 schwarz stumpfmatt (-9005)



se-11-1 / se-11-2 / se-11-3

se-11-4 / se-11-5

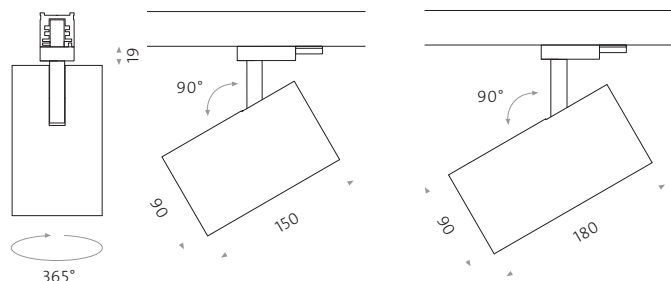

Wechselreflektoren durch Saugheber **se-sh** austauschbar



se-11

Design: Jan Blieske / Jan Dinnebier

engineering: mawa design / Ole Jeschonnek

Eutrac 3 Phasen Uni-Compact-Adapter

Aluminiumgehäuse pulverbeschichtet

365° dreh- und 90° schwenkbar

spot 13°, medium 20°, flood 35°

26 W, 3000 K, CRI > 90, 1800 lm

Leuchtenwirkungsgrad 90 %, EEI = A+

LED Brenndauer > 50 000 Std.

se-11-1 schaltbar

se-11-2 dimmbar am Gehäuse

se-11-3 dimmbar 1–10 V, Eutrac Datenbus

se-11-4 dimmbar DALI, Eutrac Datenbus

se-11-5 dimmbar Phasenabschnitt

Optional:

se-g-sk Skulpturenlinse elliptische Lichtvert.

se-g-wf Wandfluterlinse

se-hr-si/-s Zubehörhalter (silber / schwarz) für:

se-bl-4 Blendklappe, se-wa-5 Wabenraster

Gewicht: se-11-1/-2/-3 900g, se-11-4/-5 1100g

Baureihen geprüft durch 

LVK auf www.mawa-design.de unter Produkte

Product Information

LED

»seventies« 70's

CONTACT TRACK SPOTLIGHT **se-11**

»70's« – the new luminaire series from mawa.
Compact dimensions, no visible connections, 365°
rotatable and 90° pivotable, integrated transformer
technology, 1800 lm, 26 Watt, CRI > 90

Mawa sets a new standard with this high per-
formance light output. A heat sink permanently
integrated into the housing increases the available
surface area, thus creating an optimized
mass-area-cooling relationship.

Three high performance reflectors: 13°, 20° and
35° with an efficiency 90 % are available to choose
from. Thanks to a patented mawa technique, these
reflectors are easily exchangeable.




□ powder coated RAL 9016 white matt (-9016)


■ powder coated RAL 9005 black dull matt (-9005)



se-11-1 / se-11-2 / se-11-3

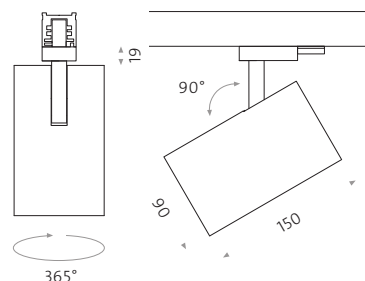

se-11-4 / se-11-5



Interchangeable reflectors exchangeable with vacuum suction tool **se-sh**

se-11

Design: Jan Blieske / Jan Dinnebier

engineering: mawa design / Ole Jeschonnek

Eutrac 3 Phasen Uni-Compact-Adapter

Powder-coated aluminum housing

365° rotatable and 90° pivotable

spot 13°, medium 20°, flood 35°

26 W, 3000 K, CRI > 90, 1800 lm

efficiency 90 %, EEL = A+

LED burning time > 50 000 hours

se-11-1 switchable

se-11-2 dimmable with a 1-10 V (on the housing)

se-11-3 dimmable 1-10 V, Eutrac Datenbus

se-11-4 DALI dimmable, Eutrac Datenbus

se-11-5 Trailing edge dimmable

Optional:

se-g-sk sculptural lens

se-g-wf wallwasher lens

se-hr-si/-s accessory holder (silver / black) for:

se-bl-4 quad cover, **se-wa-5** black honeycomb

weight: **se-11-1/-2/-3** 900g, **se-11-4/-5** 1100g

Series examined by **DEKRA**

LVK on www.mawa-design.de under Products