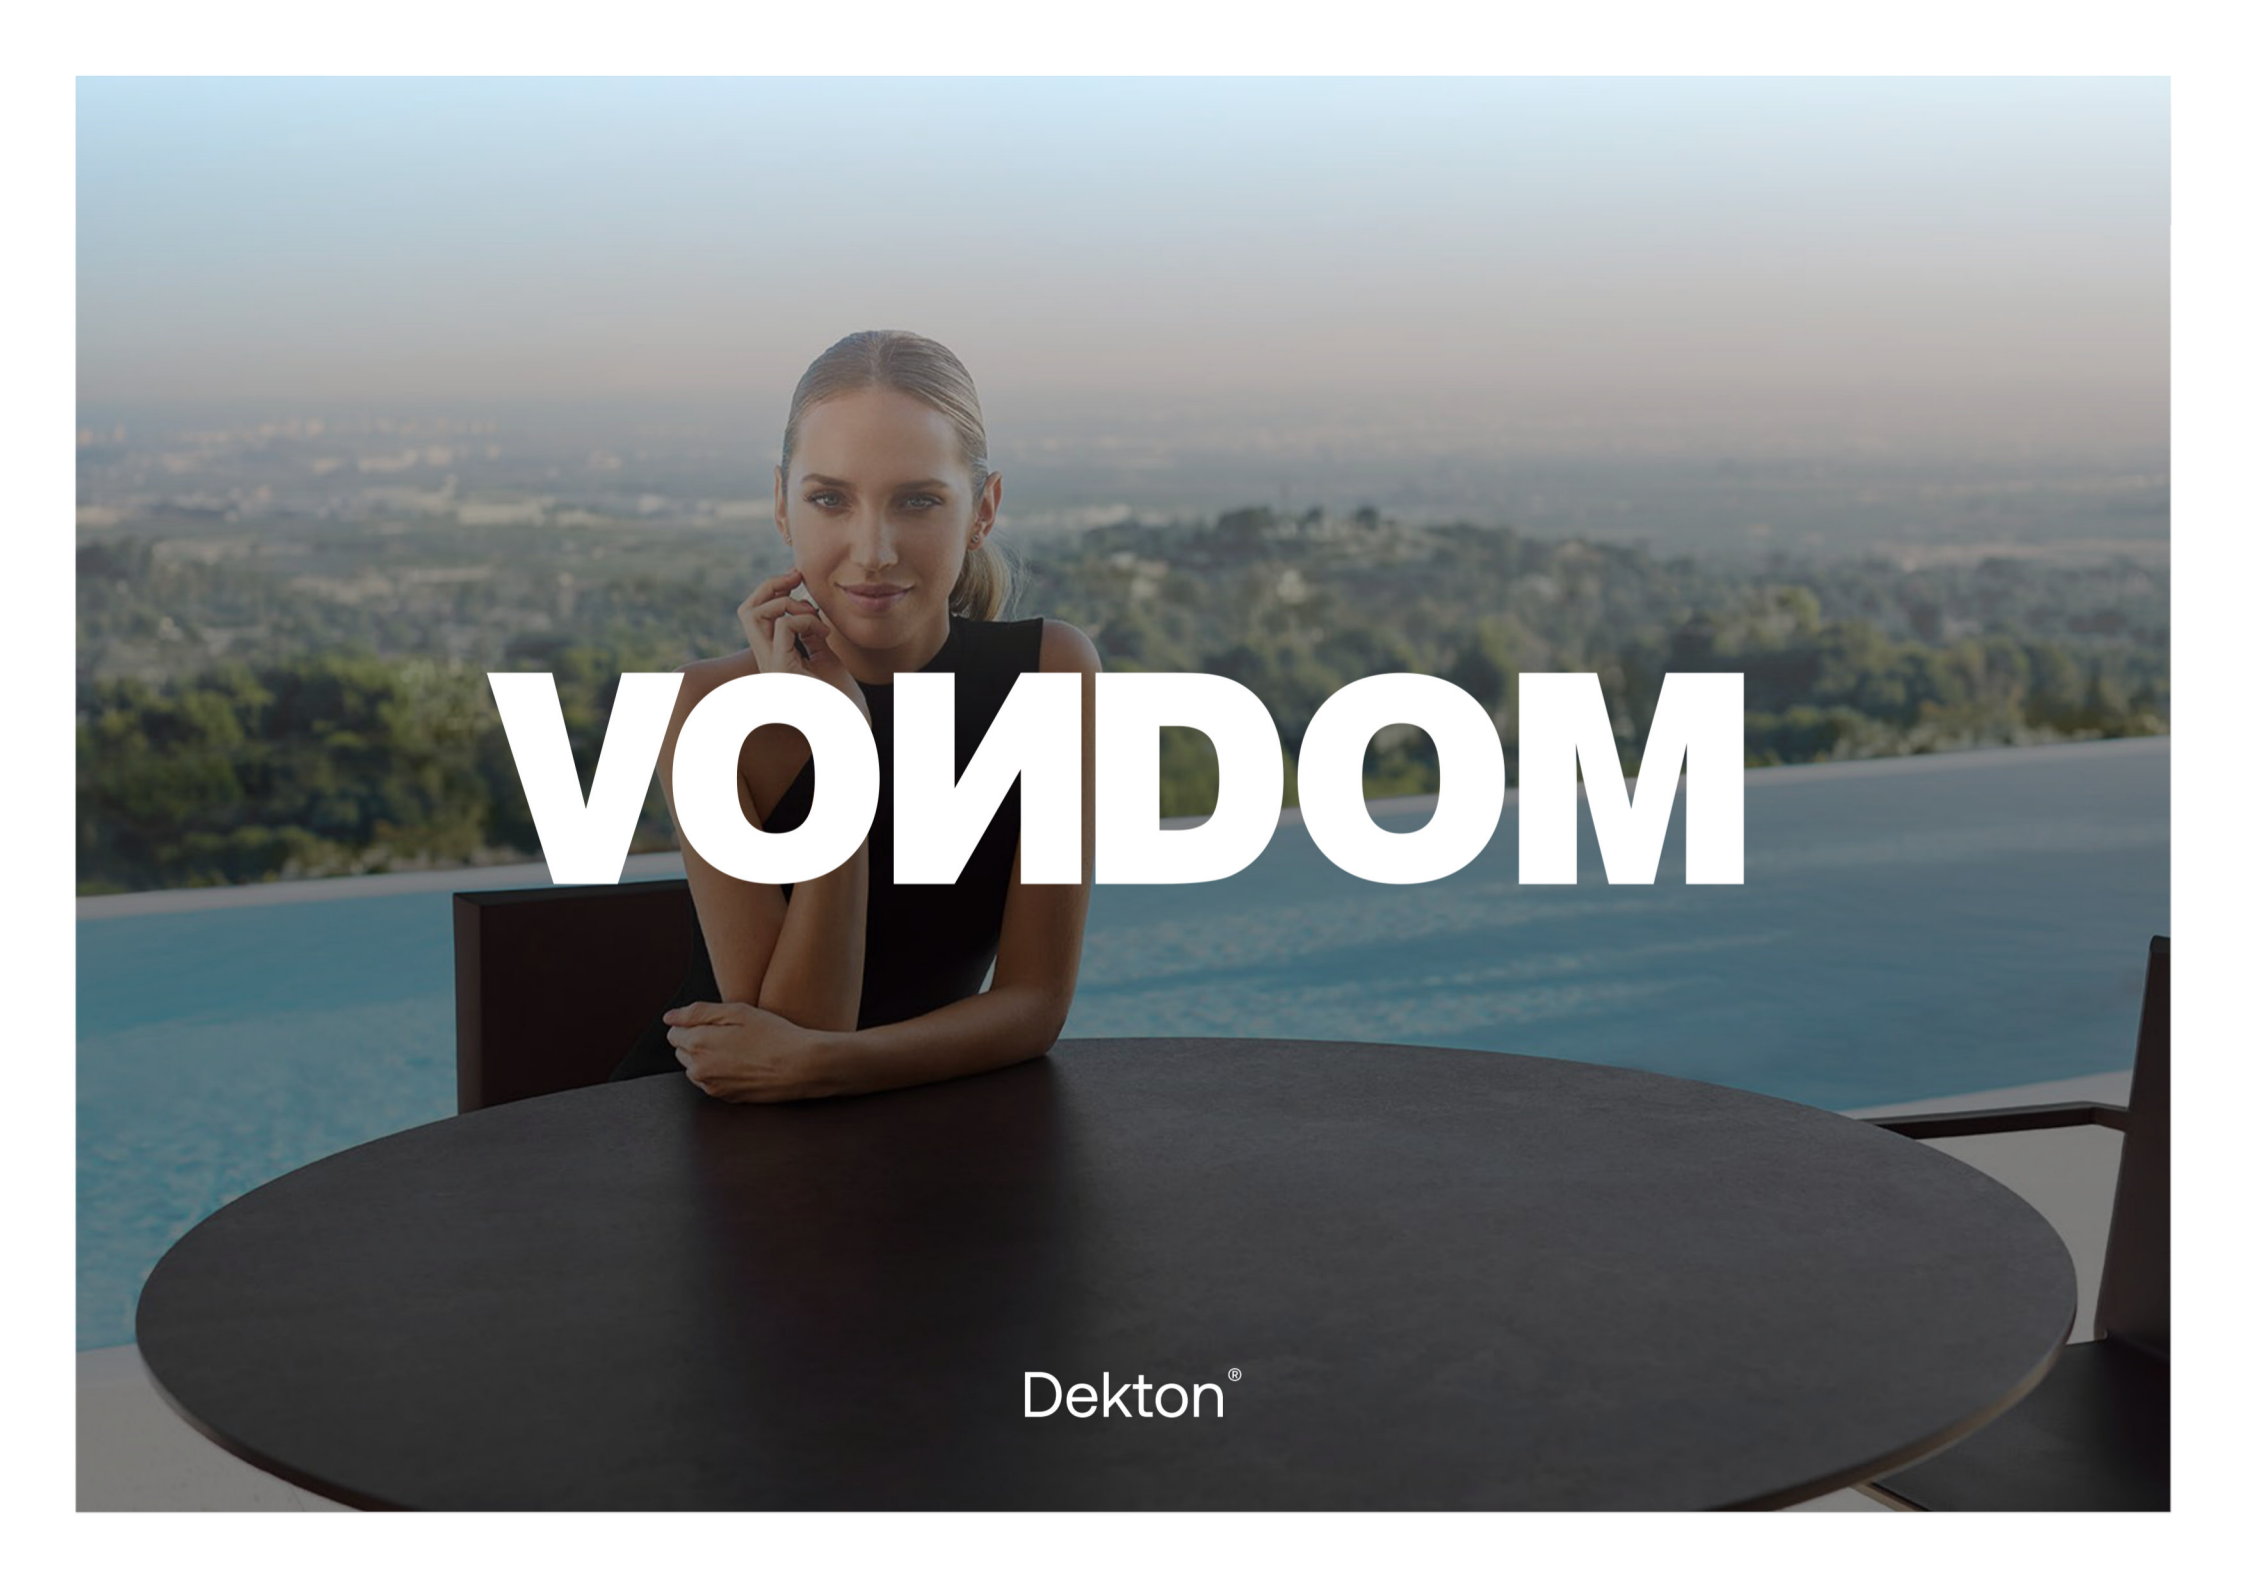


A woman with blonde hair tied back, wearing a black sleeveless top, is sitting at a dark, round table. She is resting her chin on her hand and looking towards the camera. The background features a large infinity pool and a panoramic view of a city with green hills and a hazy sky. The word "VONDOM" is overlaid in large, white, bold, sans-serif capital letters across the center of the image.

VONDOM

Dekton®

Dekton®

At Vondom we understand innovation as the opportunity to do something different. With this objective in mind, we have recently incorporated Dekton®, a very low-maintenance, long-lasting and highly resistant material.


Qualities that perfect key pieces of our collections, the tables.



Manufacturing

This material has a complex manufacturing process that results in thin and elegant sheets composed of a mixture of more than 20 natural minerals.

These include state-of-the-art porcelain and quartz surfaces.

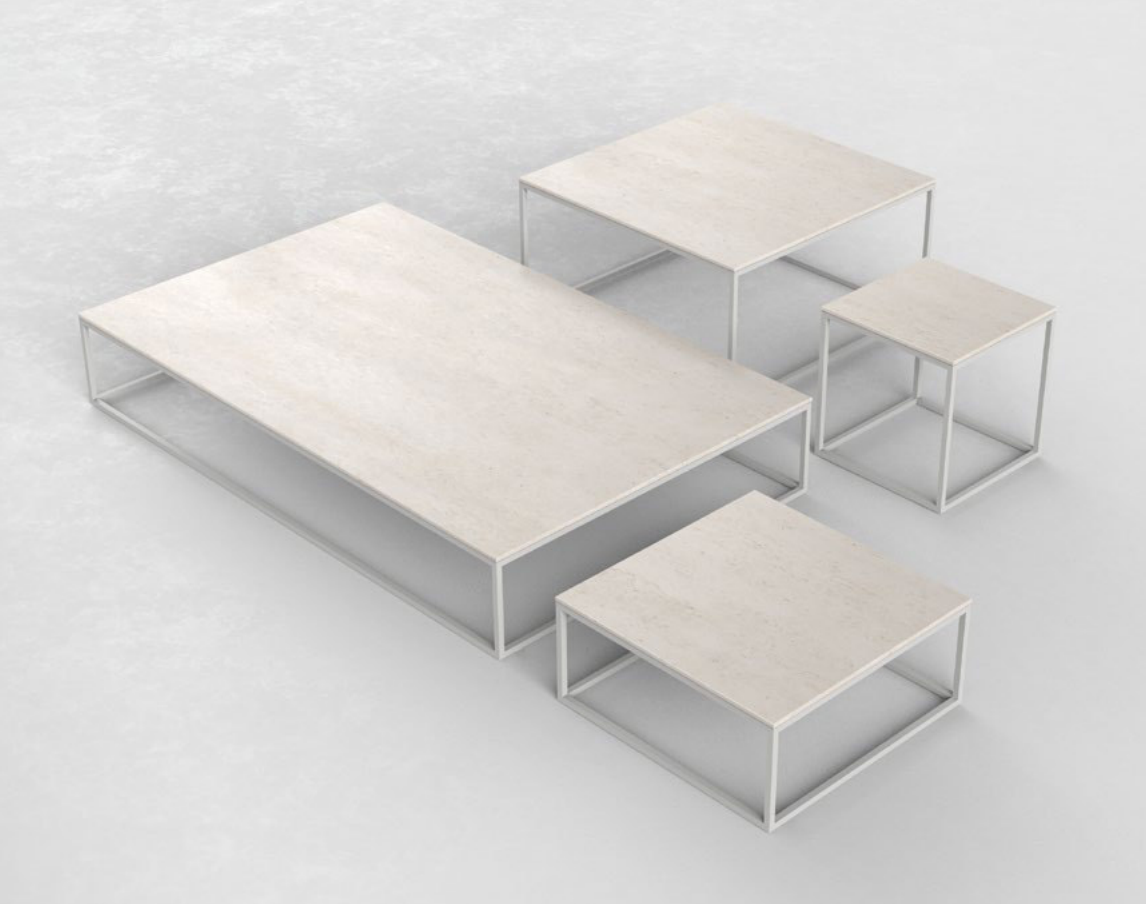

Resistance

Dekton is highly resistant due to its non-porosity. This means that it does not absorb stains.

				Kelya	Entzo	Danae
Flexural tensile strenght or modulus of rupture.	UNE EN ISO 10545-4	Average flexural resistance	N/mm2	46	45	55
		Average break load	N	2548	2313	2356
		Average break strenght	N	14966	13559	13818
Water absorption, apparent porosity, density	UNE EN ISO 10545-3	Water absorption by boiling	%	0	0,1	0,1
		Water absorption by vacuum	%	0,1	0,1	0,1
		Open porosity	%	0,2	0,2	0,2
		Aparent relative density	g/cm3	2,51	2,61	2,53
		Aparent density	g/cm3	2,50	2,61	2,52
Resistance to deep abrasion	UNE EN ISO 10545-6	Wear volume	mm3	125	106	115
Impact resistance	UNE EN ISO 10545-5	Coefficient of restitution (COR)	-	0,85	0,85	0,85
Determination of linear thermal expansion	UNE EN ISO 10545-8	Expansion 30-100°C	°C ⁻¹	6,5 · 10 ⁻⁶	5,1 · 10 ⁻⁶	6,3 · 10 ⁻⁶
Thermal shock resistance	UNE EN ISO 10545-9	Damage	-	ULA (no damage)	ULA (no damage)	ULA (no damage)
Moisture expansion	UNE EN ISO 10545-10	Expansion max	mm/m	0,1	0,1	0,1
		Expansion mid	mm/m	0,0	0,0	0,0
Frost resistance	UNE EN ISO 10545-12	Damage	-	ULA (no damage)	ULA (no damage)	ULA (no damage)



Finishes

The finish is inspired by natural stone and gives a soft matt effect to the surfaces of some of the side tables in the Vondom collections.

We have incorporated Dekton in three finishes: Entzo (white with brown tones), Danae (sand tone) and Kelya (dark grey).

Elegance, versatility and chromatic warmth that give a timeless character to the space and seeks to enhance our philosophy, creating a dialogue between the environment and the forms.



Finishes



Entzo 6003
Dekton
(12mm)



Danae 6002
Dekton
(12mm)



Kelya 6001
Dekton
(12mm)

Limpieza y cuidados

Our production is governed by the standards of our quality assurance system ISO 9001:2008 and environmental system ISO 14001:2004. And we use only the highest quality materials to guarantee a long product life.

Steps to clean Dekton®:

1. Wipe the entire surface with a damp cloth.
2. Lather with neutral soap.
3. Dry the area to remove moisture and soap residue.

For a better conservation of the furniture, it is advisable to cover each item.

VONDON

info@vondom.com

+34 962 39 84 86

vondom.com

