


Product information

VL1 Alu-Leiterplatte Optimum Ø 33 mm

Art.Nr.: MAW448 / manufacturer: [Mawa Design](#)



52,48 €

Regular retail price ~~58,31 €~~ (you save 5,83 €)

incl. 19% VAT incl. Shipping

■ Delivery time: 3 - 5 weeks



Dimensions / Technical Data:

Approx. dimensions: Ø light head 7.6cm, length 17.2cm

Adapter: The spotlight is suitable for use in the PRO-06 and PRO-R6 Powergear 3-phase tracks.

Product information

Light source: LED 12.7 Watt, Ra> 95, service life > 61000 hours / dim2warm LED 12 Watt, service life > 50000 hours

Optional color temperature:

2700 Kelvin warm white - 930 lumen

3000 Kelvin bright warm white - 980 lumen

4000 Kelvin neutral white - 1100 lumen

1800 - 3000 Kelvin dim2warm, - 1045 lumen

Beam angle: 20° - 50°

Material: powder-coated aluminum

Control optional:

1-10 volt dimmable on the housing (rotary potentiometer) (2700 - 3000 - 4000 Kelvin): 3-core power cable

DALI dimmable (2700 - 3000 - 4000 Kelvin): For 4- or 5-core power cable (control cable) required!

Casambi-Bluetooth dimmable (2700 - 3000 - 4000 Kelvin): Light control via app (3-wire power cable).

dim2warm DALI dimmable (1800-3000 Kelvin): For 4- or 5-core power cable (control cable) required!

dim2warm Casambi-Bluetooth dimmable 1800-3000 Kelvin): Light control via app (3-core power cable).

Optional color: See color selection

Special feature: Spotlight can be rotated 365° and swiveled 90

Design: Jan Dinnebier & MAWA

Product description

POWER RADIATOR wi4-str2-fe

The Wittenberg 4.0 zoom luminaires extend mawa's renowned luminaire series with a versatile solution for precise and flexible accent lighting - ideal for residential and contract areas, exhibitions, galleries and retail.

With a simple turn of the focusing ring, the beam angle can be continuously adjusted from 20 to 50 degrees. This means that objects of all shapes and sizes can be perfectly illuminated. The Wittenberg 4.0 zoom luminaires offer an exceptionally wide range of applications - from targeted accent lighting to uniform area lighting - with maximum light quality and efficiency.

The light head impresses with a large, optimally glare-free light emission surface and can be swiveled 90° and rotated 350°, allowing maximum flexibility in lighting design.

Note: The products are suitable for use in the PRO-06 and PRO-R6 Powergear 3-phase tracks.


available options

Connection

Product information

					
Phases dimmable on/off	1-10 V dimmable on housing (+50,00 €)	Dali dimmable (+50,00 €)	dim2warm DALI dimmable (+105,00 €)	Casambi Bluetooth dimmable (+100,00 €)	dim2warm Bluetooth dimmable (+155,00 €)

MAWA Color

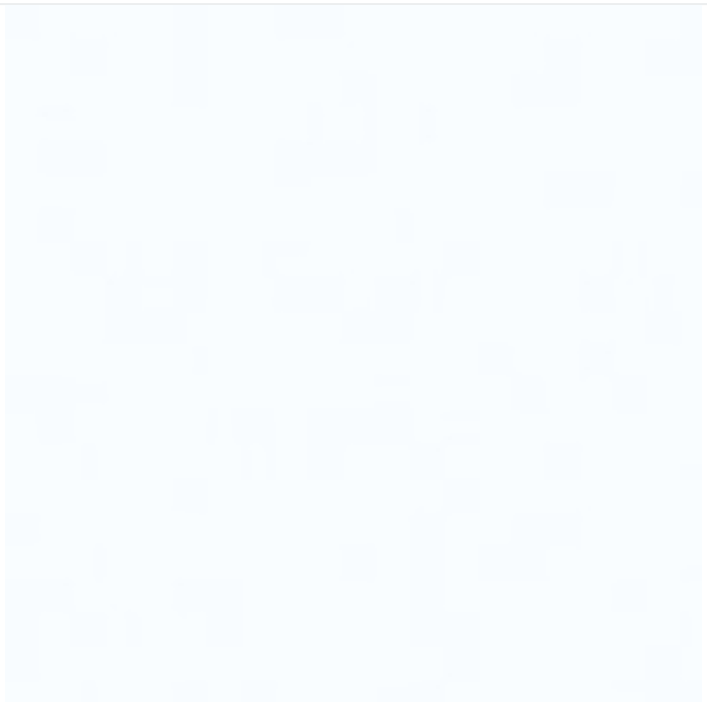	
RAL 9016 white matt	RAL 9005 black matt

Kelvin

Product information

2700 Kelvin 2700	3000 Kelvin 3000	4000 Kelvin 4000
---	---	---