


glamm[®]
fire

CREA7ION EVOPLUS

MORE SAFETY, EFFICIENCY, AND FLAME REALISM

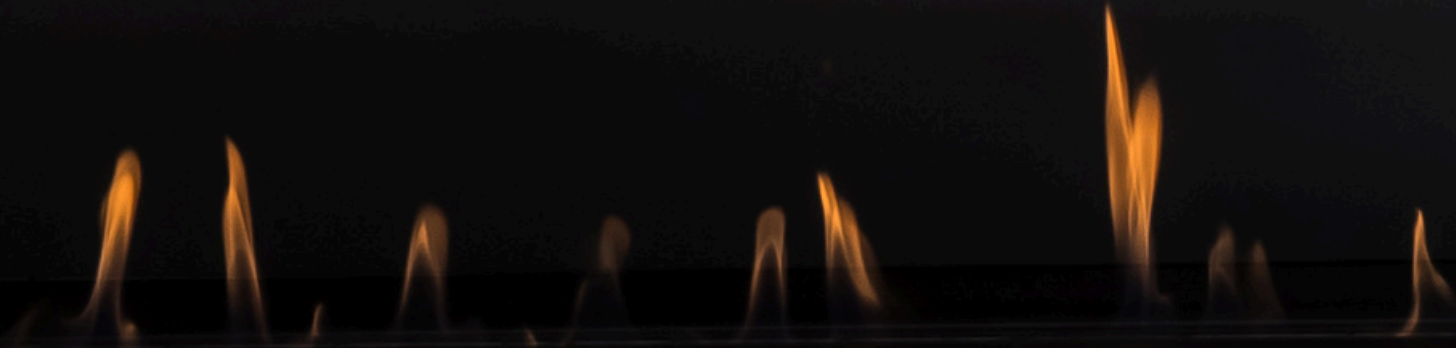

WHAT MAKES THE CREA7ION EVOPLUS UNIQUE?




Innovative technology



Enhanced safety



Superior efficiency

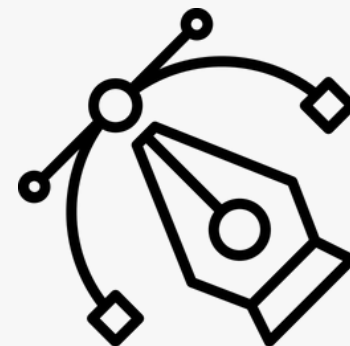

Exclusive design

MORE REALISTIC AND NATURAL FLAME

Bioethanol combustion in liquid state

Liquid combustion allows for an authentic and more realistic flame from the very first moment.



No fuel waste

Since combustion occurs in a liquid state, the fuel is fully utilized.



Rapid flame extinction

In Crea7ion EVOPlus burners, the flame can be extinguished quickly, in about 1 minute.



FLAME TYPES


Perfect flame

Flame adjustment for a more authentic and elegant effect.

Optimized flame

Flame adjustment for a more optimized bioethanol consumption.



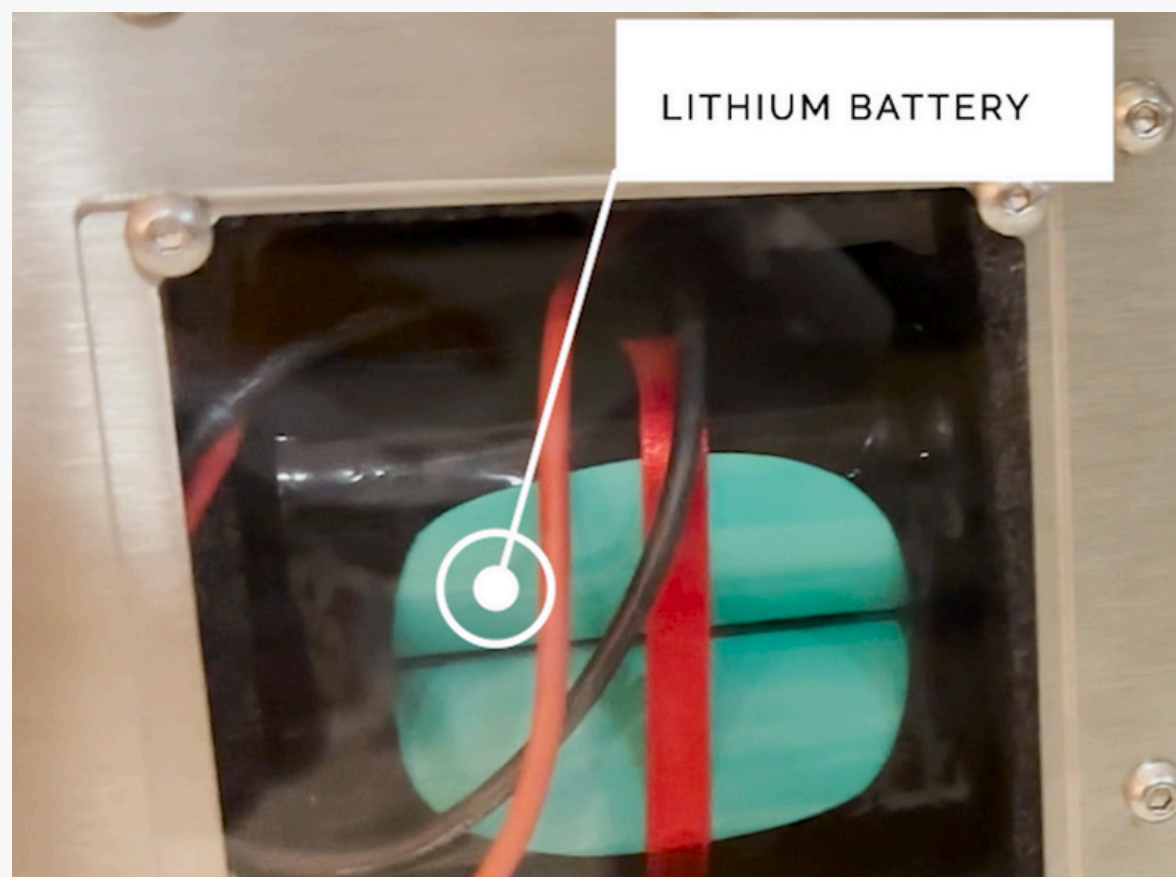

Unique battery system

Crea7ion EVOPlus burners are the only ones on the market with two operating systems: lithium battery (optional) or electric connection.



Local filling system

The customer only needs to press the button once for the pump to automatically fill the bioethanol tank.



Remote filling system

Allows for the storage of a larger volume of bioethanol in a higher capacity reservoir, positioned at a safe distance from the fireplace. It can be installed 10m, 15m, or even 20m away, as long as the reservoir's height difference does not exceed 3m.

SAFETY SENSORS

- 01** Leak and spill detection sensor - 2 units
- 02** Overheating protection sensor
- 03** Leveling and vibration sensors
- 04** Automatic tank door lock
- 05** Smothering sensor that activates the extinguishing system if the flame line is obstructed by an object.



PREMIUM DESIGN AND MATERIALS

Finishes


Brushed stainless steel

Lacquered stainless steel (black/white)

Polished stainless steel

Brushed stainless steel coated with titanium

Polished stainless steel coated with titanium

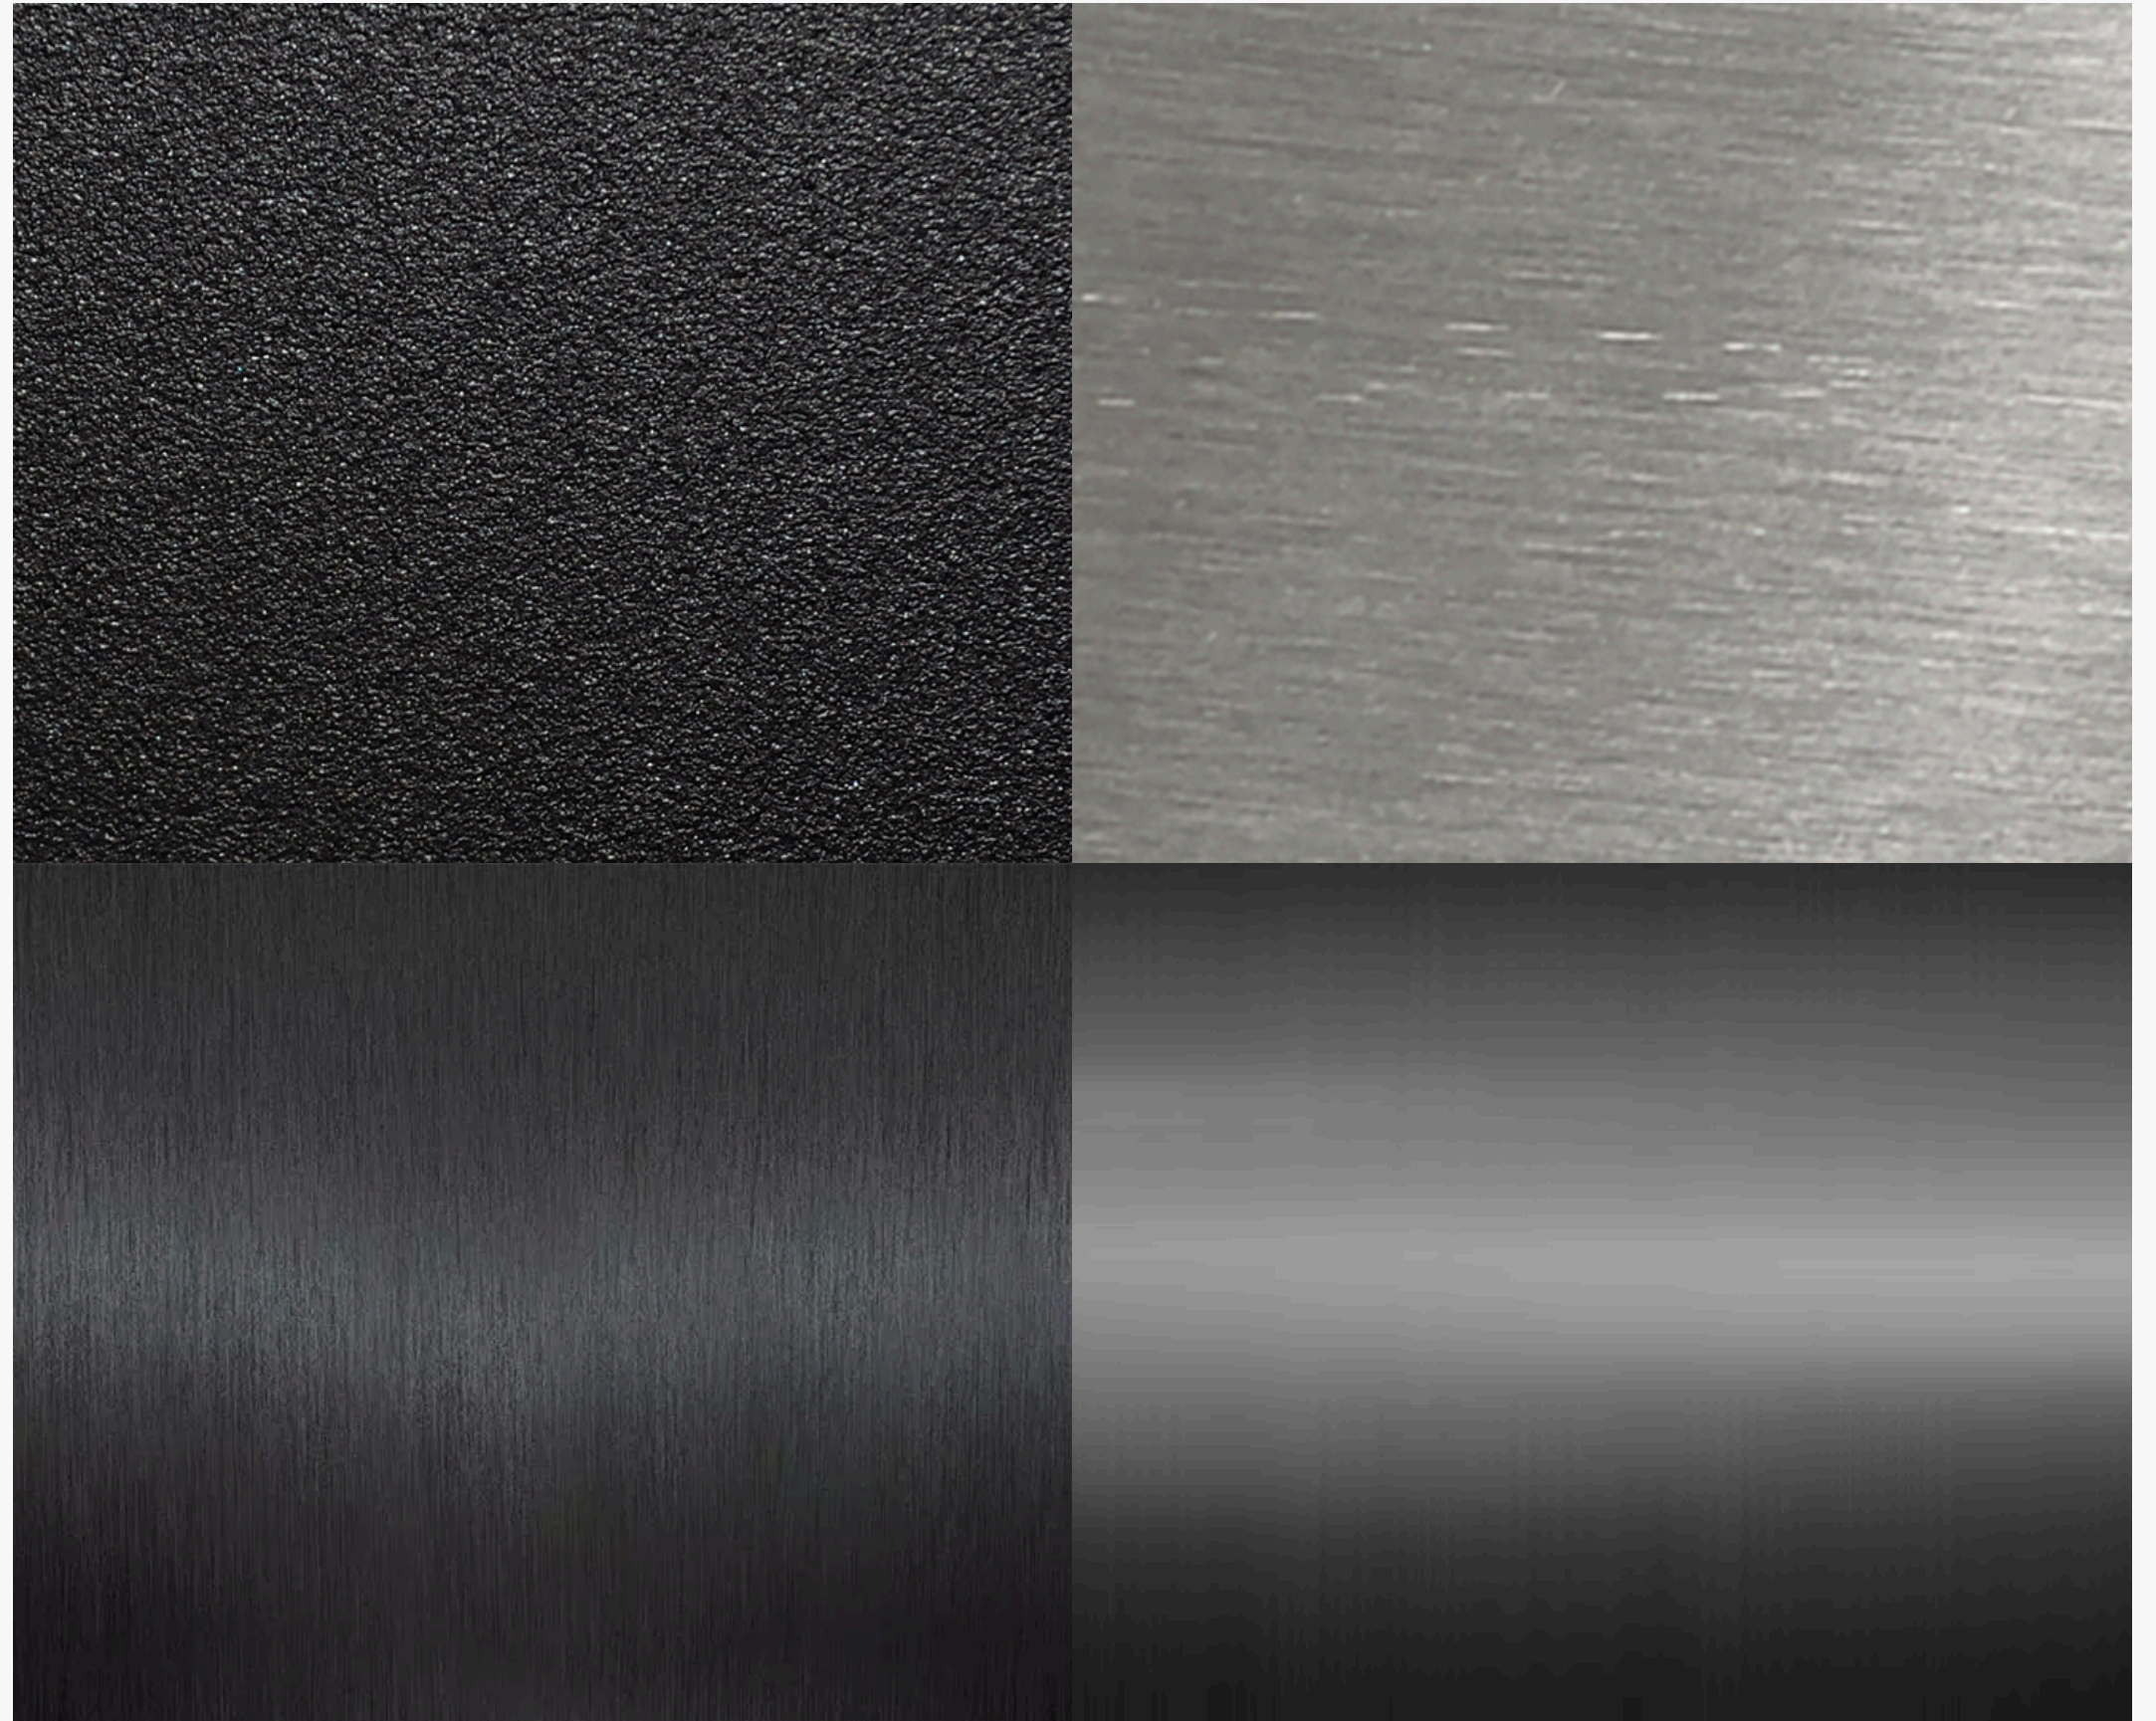

MODELS AND MEASUREMENTS

FIRE LINE

Model	Dimensions (W x D x H) (mm inches)	Weight (kg lbs)	Tank (L)	Autonomy (hours)		Power (kW)	Recommended min.area (sqm sft)
				min.	max.		
400	766 x 210 x 160 30.2 x 8.3 x 6.3	21 46.3	3,5	10	7	2	15 161.5
600	966 x 210 x 160 38 x 8.3 x 6.3	22 51.8	5	8,5	6	3,4	21 226
800	1166 x 210 x 160 45.9 x 8.3 x 6.3	29 63.9	7	8	6	4,5	29 312.2
1200	1566 x 210 x 160 61.7 x 8.3 x 6.3	42 92.9	10	9,5	6	6,75	44 473.6
1600	1966 x 210 x 160 77.4 x 8.3 x 6.3	51 121.3	15	9,5	8	9	59 635.1
2000	2366 x 210 x 160 93.2 x 8.3 x 6.3	64 141.1	15	7	6	15	96 1033.4
2400	2766 x 210 x 160 108.9 x 8.3 x 6.3	73.5 162	20	8	5.5	17	110 1184



MODELS AND MEASUREMENTS

MODULAR

Model	Dimensions (W x D x H) (mm inches)	Weight (kg lbs)	Tank (L)	Autonomy (hours)		Power (kW)	Recommended min.area (sqm sft)
				min.	max.		
700	700 x 250 x 160	21.5	5	8	6	3.5	21
	27.6 x 9.9 x 9,6	47.4					226
900	900 x 250 x 160	37	8	7	5	4,5	29
	35.4 x 9.9 x 9,6	81.6					312.1
1300	1300 x 250 x 160	52	10	6	4	6,75	44
	51.2 x 9.9 x 9,6	114.6					473.6



CREA7ION EVOPLUS

600 LITE



DIFFERENCES

FIRE LINE VS 600 LITE



Finishings	Brushed stainless steel Lacquered stainless steel (black/white) Polished stainless steel Brushed stainless steel coated with titanium Polished stainless steel coated with titanium	Brushed stainless steel Black lacquered stainless steel
Material		
Combustion zone	Brushed stainless steel coated with black ceramic	Brushed stainless steel
Dimensions	Customizable from 400mm to 2400mm	600mm
Ignition Mode	Remote control and display	Remote control and display
Tank	3,5L, 5L, 7L, 10L, 15L and 20L	5L
Autonomy	5,5 - 10 hours	6 - 8,5 hours
Filling System	Automatic local filling	Manual filling
Home Automation	Integrated (subject to authorization)	Not integrated
Battery	Optional lithium battery	Optional lithium battery

MODELS AND MEASUREMENTS

— 600 LITE

Model	Dimensions (W x D x H) (mm inches)	Weight (kg lbs)	Tank (L)	Autonomy (hours)		Power (kW)	Recommended min.area (sqm sft)
				min.	max.		
600 ^{lite}	966 x 210 x 160 38 x 8.3 x 6.3	22 51.8	5	8,5	6	3,4	21 226



glamm[®]
fire